

Philips Signage Solutions
P-Line Display

55"
Powered by Android
700cd/m²

SignageSolutions

55BDL5057P

Tough and capable

Robust, bright 24/7 display.

Meet the demands of challenging environments with a robust P-Line professional Full HD display. Tough components keep this display working from kitchen to engine room. The wide viewing angle ensures crucial information is clear.

Brilliant picture. Strong build.

- Android SoC processor. Native and web apps
- IPS panel: rich color consistency from every angle
- · Robust metal housing
- D-image:clinically accurate imaging

Effortless setup. Total control.

- · CMND & Deploy. Install and launch apps remotely
- Operate, monitor and maintain with CMND & Control
- CMND & Create. Develop and launch your own content
- Proof of Play for Android content. Know what's playing
- Integrated mPCle slot for optional 4G/LTE module

Robust system solution

- · Energy-saving automatic backlight control
- Integrated HTML5 browser. Play and control online content
- · FailOver ensures content is always playing



Highlights

Powered by Android

Control your display via an Internet connection. Android-powered Philips Professional Displays are optimized for native Android apps, and you can install web apps directly to the display too. A new Android OS ensures the software is kept secure and remain to the latest specification for longer.

D-image



This Philips Professional Display is factory-calibrated to meet clinical compliance standards for greyscale performance. The optimal image achieved by the display can be used to review medical images in consultation rooms or lecture theatres.

CMND & Control



Run your display network over a local (LAN) connection. CMND & Control allows you to perform vital functions like controlling inputs

and monitoring display status. Whether you're in charge of one screen or 100.

CMND & Create



Take control of your content with CMND & Create. A drag-and-drop interface makes it simple to publish your own content-whether it's a daily specials board or branded corporate information. Preloaded templates and integrated widgets ensure your stills, text, and video will be up and running in no time.

CMND & Deploy

Quickly install and launch any app-even when you're off-site and working remotely. CMND & Deploy lets you add and update your own apps, as well as apps from the Philips Professional Display App Store. Simply scan the QR code, log in to the store, and click on the app you want to install. The app is automatically downloaded and launched.

Integrated mPCle slot

Easily connect 4G/LTE modules to your Philips professional display. The integrated mPCle slot enables your display to communicate with other devices that share the same wireless

connectivity. Invaluable if you're installing displays in locations such as banks or government buildings, where you cannot get onto the local network.

FailOver





From waiting room to meeting room, never show a blank screen. FailOver lets your Philips Professional Display switch automatically between primary and secondary inputs ensuring content keeps playing even if the primary source goes down. Simply set a list of alternate inputs to be sure your business is always on.

OPS slot



Integrate a full-power PC or Android-powered CRD50 module directly into your Philips Professional Display. The OPS slot contains all the connections you need to run your slot-in solution, including a power supply.

• USB Playback Picture: BMP, GIF, JPEG, JPG, PNG

• USB Playback Video: MKV, MP4, MPG, TS, VOB,

On-Screen Display Languages: English, French,

Japanese, Danish, Dutch, Finnish, Norwegian,

German, Spanish, Polish, Turkish, Russian, Italian,

Simplified Chinese, Traditional Chinese, Arabic,

Regulatory approvals: BSMI, CB, CCC, CE, CECP,

EAC, EMF, EnergyStar 7.0, PSB, UL/cUL, VCCI,

3GP, AVI, DAT, FLV, MOV, WEBM

• CPU: Octacore Cortex A53 1.5GHz

Miscellaneous

Portuguese, Swedish

FCC, Class A, PSEWarranty: 3 year warranty

Internal Player

• GPU: PowerVR SGX6110

Memory: 2GB DDR3

• Storage: 16GB EMMC

Specifications

Picture/Display

- Diagonal screen size: 54.6 inch / 138.78 cm
- Panel resolution: 1920x1080p
- Optimum resolution: 1920 x 1080 @ 60Hz
- Brightness: 700 cd/m²
- Contrast ratio (typical): 1300:1
- Dynamic contrast ratio: 500,000:1
- Aspect ratio: 16:9
- Response time (typical): 8 ms
- Pixel pitch: 0.63 x 0.63 mm
- Display colors: 1.07 billion
- \bullet Viewing angle (H / V): 178 / 178 degree
- Operating system: Android 5.1.1

Connectivity

- Video input: Display Port1.2 (x1), DVI-I (x 1), HDMI 1.4 (x2), USB 2.0 (x2), USB 2.0 (x1)
- Video output: DVI-I (x1), DisplayPort 1.2 (x1)
- Audio input: 3.5 mm jack
- Audio output: 3.5mm jack
- Other connections: OPS, Micro SD (x1), Micro USB(type B)x1
- Optional WiFi functionality: requires WiFi module and external antennas
- External control: RJ45, RS232C (in/out) 2.5 mm jack, IR (in/out) 3.5 mm jack

Supported Display Resolution

Computer formats

Refresh rate Resolution 1920 x 1080 60Hz 1360×768 60Hz 1280 x 800 60Hz 1280×768 60Hz 1024×768 60. 75Hz 1280 x 1024 60Hz 1600 x 1200 60Hz 640 x 480 60, 72, 75Hz 720 x 400 70Hz 60, 75Hz 800×600 Video formats

Resolution Refresh rate 1080p 50, 60Hz 50, 60Hz 720p 50Hz 576p 480p 60Hz 1080i 25, 30Hz 480I 30Hz 25Hz 576i

Dimensions

• Set dimensions (W \times H \times D):

1228.6 x 699.4 x 71.1 mm

- Set dimensions in inch (W x H x D): 48.4 x 27.6 x 2.80 inch
- Bezel width: 6.5 mm
- Product weight (lb): 55.6 lb
- Product weight: 25.2 kg
- VESA Mount: 400 x 400 mm, M6

Convenience

- Placement: Landscape, Portrait
- \bullet Tiled Matrix: Up to 15 x 15
- · Keyboard control: Hidden, Lockable
- Signal loop through: DVI, VGA, RS232, IR Loopthrough, DisplayPort
- Network controllable: RJ45, RS232, HDMI (One Wire)
- Energy saving functions: Smart Power
- · Screen saving functions: Pixel Shift, Low Bright
- · Ease of installation: AC Out, Carrying Handles
- Other convenience: G sensor

Power

- Standby power consumption: <0.5 W
- Mains power: 100 ~ 240 VAC, 50 ~ 60 Hz
- Consumption (Typical): 110 W
- Comsumption (Max): 245 W
- · Energy Label Class: G

Operating conditions

- Temperature range (operation): 0 \sim 40 $^{\circ}$ C
- Temperature range (storage): -20 ~ 60 °C
- Relative humidity: 20 ~ 80 %
- Altitude: 0 ~ 3000 m
- MTBF: 60,000 hour(s)

Sound


• Built-in speakers: 2 x 10W RMS

Accessories

- Included accessories: Remote Control, Batteries for remote control, Quick start guide, AC Power Cord, RS232 cable
- Included Accessories: Edge Alignment Kit (1)-2pcs, Edge Alignment Kit (2)-1pcs, Logo guide, Philips logo (x1), Thumbscrew (8pcs), RS232 daisychain cable
- Stand: BM04642/00(optional)

Multimedia Applications

 USB Playback Audio: AAC, M4A, MP3, WMA, MP1, MP2

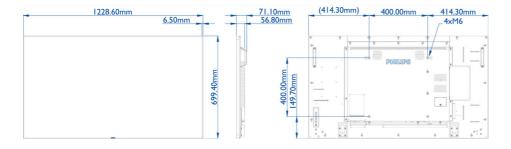



Issue date 2021-03-02

Version: 10.2.1

© 2021 Koninklijke Philips N.V.

All Rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. or their respective owners.

12 NC: 8670 001 41464 EAN: 87 12581 74227 0

www.philips.com